


STRONG CRUSHER

- * The strong crusher are made of steel, durable and rigid, without influence by crushed material.
- * Excellence quality and capability, outstanding performance cutter blade-rotary blade are suitable to crush solid material such as: P.C, Glassfuse etcplain blade for soft material , particularly rubber and film etc.....
- * With heavy duty type of oil seal and bearing install, Double insulation hopper with low sound and low vibration during the operation.
- * Able to acquire great quantity of crushed material with a minimum power, occupier small space as well as convenience to re-move with wide castor wheels (10 hp and below model)
- * Easy to clean with one-touch operation.



Blade Stands

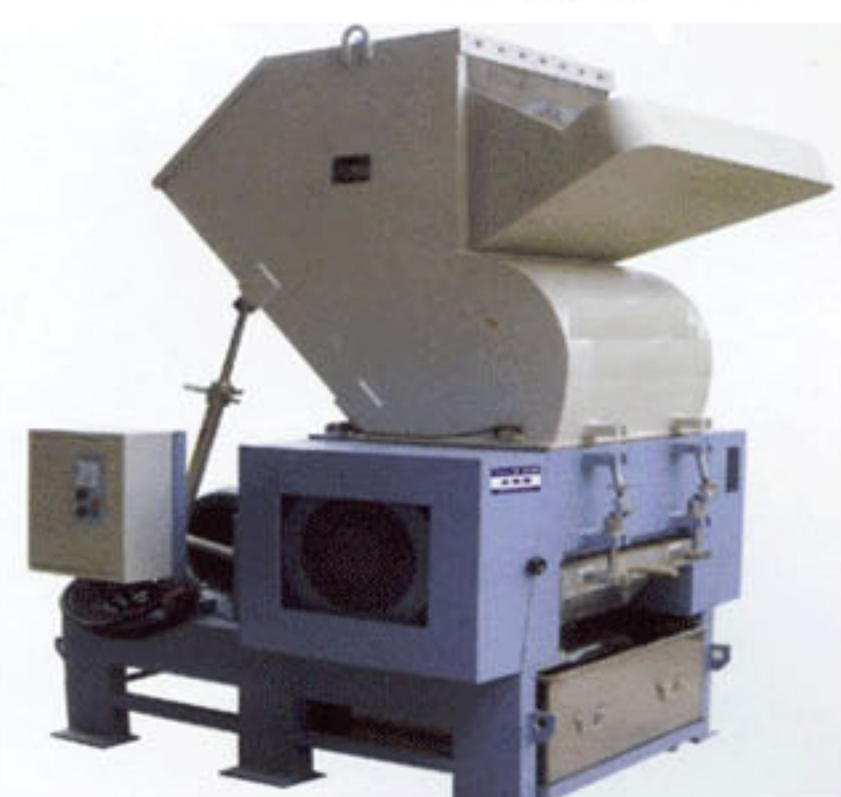

SPECIFICATIONS:

Model	JYSC-0305	JYSC-300	JYSC-7510	JYSC-7515	JYSC-1520	JYSC-1530	JYSC-3050	JYSC-7575	JYSC-75100
Power	5HP	7.5HP	10HP	15HP	20HP	30HP	50HP	75HP	100HP
Crushing Dimension	250 x 210 mm	300 x 210 mm	380 x 250 mm	500 x 280 mm	510 x 350 mm	630 x 350 mm	710 x 480 mm	800 x 550 mm	800 x 800 mm
Crushing Ability	150-300kg/hr	180-250kg/hr	180-360kg/hr	300-400kg/hr	360-720kg/hr	600-1200kg/hr	800-1600kg/hr	900-1800kg/hr	1000-2000kg/hr
Rotary Cutter	3/15pcs	3/15pcs	6/18pcs	6/24pcs	6/21pcs	6/21pcs	6/18pcs	6/21pcs	6/21pcs
Stationally Cutter	2pcs	2pcs	2pcs	2pcs	2pcs	2pcs	4pcs	4pcs	4pcs
Dimension mm	950x630x1100	950x720x1150	1080x820x1330	1200x950x1450	1700x1350x1760	1700x1480x1760	2000x1600x2000	2300x1800x2800	3500x2500x4000
Weight	209kg	350kg	600kg	830kg	1100kg	1300kg	2800kg	3800kg	4500kg

INDUSTRIES WATER CHILLER

- Features:**
- * All new ,imported compressor.
 - * Superb imported components,With longer terms of service.
 - * Help save no less than 30%,of your power rates.
 - * Two sets of ximpressor which can be used jointly or
 - * Independent, (10° Cand Above).
 - * Micro - processing controller,easy operation.



SPECIFICATIONS:

Model	JYWC-5HP	JYWC-8HP	JYWC-10HP	JYWC-15HP	JYWC-20HP	JYWC-30HP	JYWC-40HP
Maxfilm	120L/min	250L/min	250L/min	350L/min	350L/min	500L/min	500L/min
Motor Capacity	1HP	2HP	2HP	3HP	3HP	5HP	5HP
Compressor power	5HP	8HP	10HP	15HP	20HP	30HP	40HP
Refrigerant	R22						
Water Pressure	25	28	28	30	30	35	35
PPT	1/2x4	1+1/2	1+1/2	2	2	3	3
Weight kg	160	340	410	480	540	680	810
Size (cm)	96x52x91	150x70x130	150x70x130	170x75x140	210x90x120	210x105x140	255x110x150

INDUSTRIES AIR CHILLER

Safety system :

- * Circuit breaker
- * Pump reverse protective indicator lamp
- * Pump overload protective indicator lamp
- * Compressor overload protective indicator lamp
- * Refrigerant shortage protective indicator lamp
- * Freeze protective indicaror lamp
- * Refriger safety valve
- * Buzzer
- * High - pressure gauge
- * Low - pressure gauge
- * Phase failure protective



SPECIFICATIONS:

Model	JYWD-5HP	JYWD-8HP	JYWD-10HP	JYWD-15HP	JYWD-20HP	JYWD-30HP	JYWD-40HP
Maxfilm	120L/min	250L/min	250L/min	350L/min	350L/min	500L/min	500L/min
Motor Capacity	1HP	2HP	2HP	3HP	3HP	5HP	5HP
Compressor power	5HP	8HP	10HP	15HP	20HP	30HP	40HP
Refrigerant	R22						
Water Pressure	25	28	28	30	30	35	35
PPT	1	1+1/2	1+1/2	2	2	3	3
Weight kg	185	355	405	500	555	705	830
Size (cm)	127x68x139	150x75x150	150x70x150	180x90x170	180x90x170	220x110x180	220x110x180

MOULD TEMPERATURE CONTROL UNIT

Safety System

- * Motor reverse protective
- * Pump overload protective lamp
- * Overheat thermostat lamp
- * Alar mindicating system
- * Circuit breaker
- * By pass system
- * Heat insulation
- * Net temperature digital display meter (Model)



FEATURES

- * Easy and simple to control and operate with microcomputer of touch type.
- * PID controlled memory of touch type automatically calculates temperature control precision + C, resulting 35% energy saving.
- * Imported pump with high pressure and flow capacity guarantee even temperature on mould Brand-new design, elegant appearance, small size and convenient maintenance .
- * All internal bladder in stainless steel and high-pressure explosion pipe arrangement.

SPECIFICATIONS:

Model	JYTC - 1	JYTC - 2	JYTC - 3	JYTC - 4	JYTC - 5
Temperature Range	40 C - 120 C	40 C - 95 C	40 C - 150 C	40 C - 200 C	40 C - 120 C
Fluid	Heat Transfer Oil	Water	Heat Transfer Oil	Heat Transfer Oil	Water
Heating capacity	6 Kw	6 Kw	9 Kw	12 Kw	12 Kw
Cooling Type	Indirect Cooling	Indirect Cooling	Indirect Cooling	Indirect Cooling	Indirect Cooling
PUMP	Motor Capacity	1 HP	1 HP	1 HP	2 HP
	Max Pressure	4.0kg / CM	4.0kg / CM	4.0kg / CM	6.0kg / CM
	Max Flow	60 l/min	60 l/min	60 l/min	80 l/min
Power Supply	220 V / 380 V / 415 V - 60/50 Hz				
Tank Capacity	8 liter	8 liter	8 liter	8 liter	8 liter
Pipe Dia	Circulation System	2 x 1/2"	2 x 1/2"	2 x 1/2"	2 x 1/2"
	Cooling System	1/2"	1/2"	1/2"	1/2"
Overall Dimension	650 x 280 x 700 mm				
Weight	60	60	60	70	70

HOT AIR DRYING HOPPER



In addition to the reliable and Durability, "JY Hopper Dryer" design characteristic by precision Temperature control. Greatly Drying efficiency, Model available such as general hot air re-cycle dryer, it is an indispensable equipment in the plastic processing factory.

FEATURES

- ** Even Heat Distribution.
- High efficiency , save drying time.
- ** Accurate Thermo-Control
- Very High Accuracy assured by excellent controller.
- ** Labour-Saving:
- Convenience to change of material.
- ** Reliable Design.
- Compact, easily to use.
- ** Increase the speed for injection cycle.
- Decreases melting time with pre heat material.
- ** 24 hrs timer (Option)

SPECIFICATIONS:

Model	Diameter	Height	Capacity	Heater	Blower	Applicable Injection MIC
JYHD-12E	280 mm	790 mm	12 kg	2.1 kw	90 w	1.oz
JYHD-25E	350 mm	965 mm	25 kg	2.7 kw	90 w	3.oz
JYHD-50E	430 mm	1140 mm	50 kg	3.9 kw	200 w	5-8.oz
JYHD -100E	550 mm	1390 mm	100 kg	6 kw	250 w	10-30.oz
JYHD-200E	700 mm	1660 mm	200 kg	10 kw	400 w	30-60.oz
JYHD-400E	850 mm	2130 mm	400 kg	20 kw	400 w	60.oz up

STANDARD HOPPER DRYER ATTACHING SEAT



Standard Hopper Dryer Base



Patent window type magnetic stand-ring shaped magnetic frame, remove the scurf to ensure the safety screw rod will be free from blocking trouble, extra large transport rear bottom window, easy access for cleaning.



New mixed feeder stand: parts of a patent and practical feeder stand measurement Mixer feeder device. Mainly for proportional NEW & Recycle material.

STANDARD HOPPER DRYER FRAME

A-FRAME

Insufficient height of plant can be overcome. It is easy, safe and convenient for material cleaning, and maintenance.

SPECIFICATIONS:

Model :	External Dimension	Applicable YMHD
JYM-FA	780 x 680 x 680 mm	JYHD 12E - 100 E



B-FRAME



APPLICATION:

To integrate the dryer and feeding into one structure for better appearance, convenience for cleaning, change of material, maintenance and repair.

Model	External dimension	Applicable YMHD
JYM -FB 1	615X450X845mm	JYHD 12E - 100E
JYM - FB 2	650X700X1050MM	JYHD 200E - 400E



Suction Box For Stand type dryer smooth operation in material suction unloading.



Hopper Dryer Dust Collector Enviroment Protect

Air Cleaner Protector

Table guiding you for correct models.

Model	Size (Diaxheight)	Applicable For YMHD
JYDC-15A	170X610 mm	JYHD-12.25E
JYDC-22A	170X745 mm	JYHD-50.100E
JYDC-36A	240X1050 mm	JYHD-200.400E



Application

Install dust collector on the Hopper Dryer to keep a clean environment of plant, the effective of filtering dust is up to 100%

Air Cleaner Protector

Table guiding you for correct models.

Model	Size (Diaxheight)	Applicable For YMHD
JYDC-15D	170X610 mm	JYHD-12.25E
JYDC-22D	170X745 mm	JYHD-50.100E
JYDC-36D	240X1050 mm	JYHD-200.400E

