


CRUSHER CUTTER BLADE & NETTING

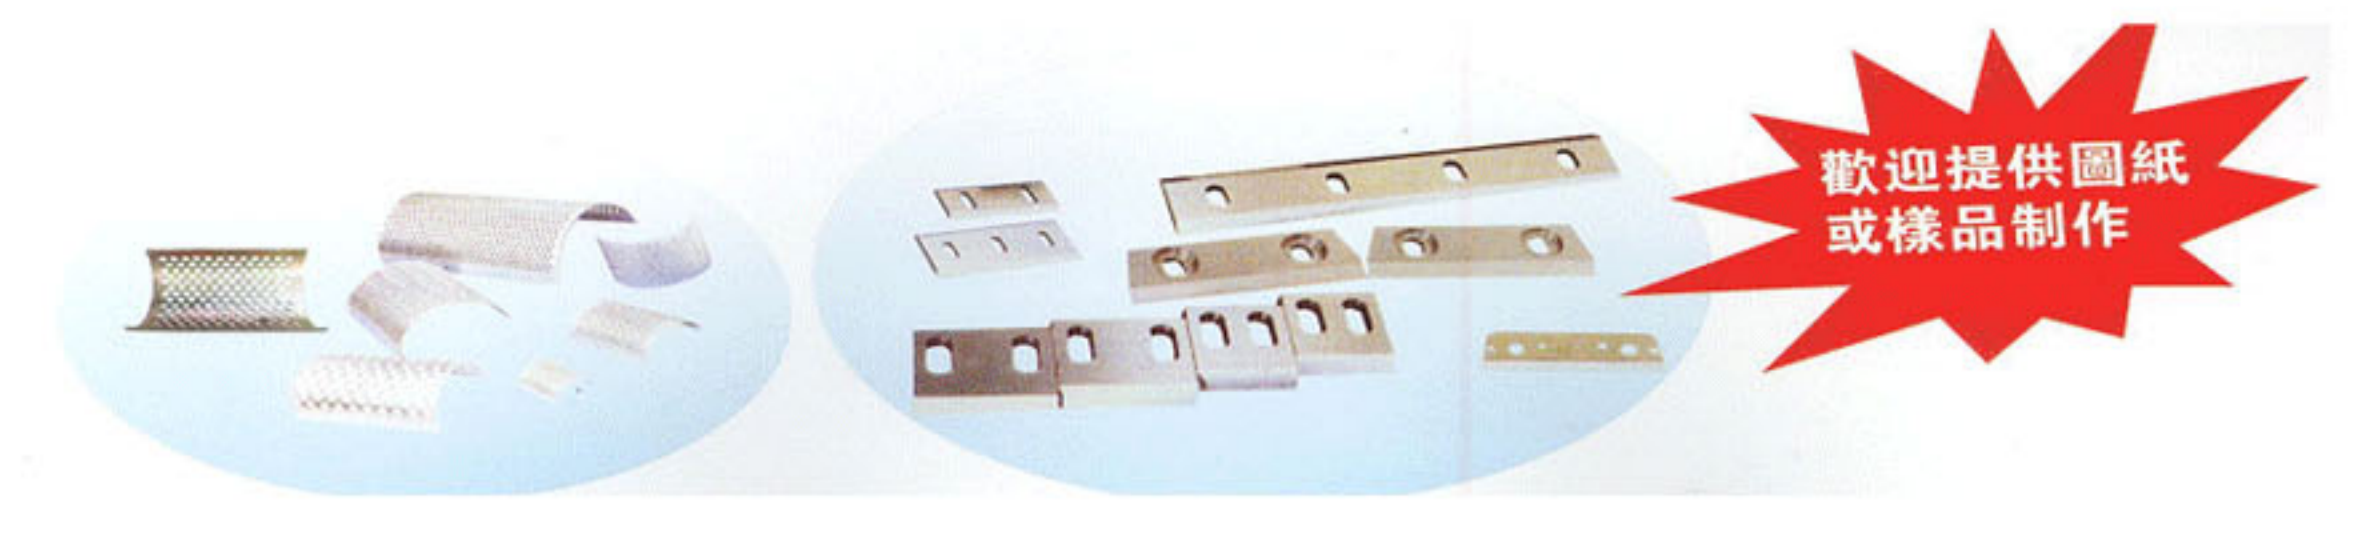

歡迎提供圖紙
或樣品制作

RE-POWDER SHAKING SCREEN

FEATURES:
 ** Hiht efficiency, exquisite design and service life.
 ** Easy to change net, to operate and to chean.
 ** Impurities of scraps can be automatically removed and operation can be automated.
 ** Easy to keep in good maintenance without mechanical movement, either single layer or several layers can be used.
 ** All parts in touching with raw materials made of staninless steel.



JYZE-100

Table guiding you for correct models

Model	Power	Sieve Dia	Sieve Diameter	No. of layers of screen	Dimensions
JYZE-100	1/4 HP	990 x 450	ø 5 ø 4 ø 3 ø 2	2	1510 x 730 890

Horizontal Colour Mixers

FEATURES:
 ** Mixing tank and blade are made of stainless steel assure tidy and clean.
 ** Install with safety device and protection.
 ** The mixing tank are able to inclined from 0 ~ 100° for easy cleaning.
 ** Control with automatic timer, time set from 0 ~ 30 minutes.



Model	Power	Capacity	Rotating speed	Dia L x W x H (mm)	Weight (kg)
JYHA-100	3	100	68	1110 x 850 x 1295	295
JYHA-150	4	150	68	1410 x 850 x 1295	368
JYHA-200	5	200	68	1590 x 1000 x 1395	539

Vertical Colour Mixers

FEATURES:
 ** Mixing tank and rotation blade are made of stainless steel,are easy to re-move & cleaning.
 ** High capacity, Simple operation.
 ** Motor drive operation, high speed mixing, save labour and high efficiency.



Model	JYHB-50	JYHB-100	JYHB-150	JYHB-200
Motor Power	2 HP 3ø	5 HP 3ø	7.5 HP 3ø	7.5 HP 3ø
Mixing Capacity	50kg	100kg	150kg	200kg
Tank Diameter	630mm	180mm	900mm	900mm
Machine Diameter(cm)	92x80x104	102x90x140	124x114x150	130x115x160
Rotating Speed (r/min)	68	68	68	68
Weight (kg)	130 kg	180 kg	280 kg	320 kg

Rotary Mixers

FEATURES:
 ** Applicable to mix colour, re- grind and virgin material.
 ** Mixing tank are specially design and made of 304 stainless steel.
 ** Install with safety device and protection.
 ** Timer setting from 0 ~ 30 minutes.



Model	Power	Capacity (kg)	Rotating speed	Volatage (v)	Dimensions(cm)	Net weight (kg)
JYHC-50	3/4	50	50	380 3ø	892x900x1542	62
JYHC-100	1	100	50	380 3ø	1102x900x1562	82
JYHC-200	2.2	200	50	380 3ø	1982x1202x2082	172
JYHC-300	2.2	300	50	380 3ø	1982x1202x2282	355

STROAGE TANK



Application :-
 * Simple structure, easy to clean and maintain.
 * Compact design with castor wheel
 * Stainless steel construction
 * Compatible to install single & double or triple take out devices.



Model	Effective Capacity	Capacity	Dimension(mm)
JYQ-50	85	50	510x510x1020
JYQ-100	170	100	610x610x1020
JYQ-200	340	200	960x960x1020
JYQ-300	510	300	1210x1210x1150

AUTOMATIC VACUUM LOADER

JYAL-700G

Features:
 ** Fully automatic programmed operation
 ** Alarm for shortage of material
 ** Equipped with-speed motor , small volume, strong suction power, suitable for deferent type of new materials.
 ** Stainless Steel hopper construction.
 ** Main controller and hopper designed, ro ensures safety and convenient.
 ** Separated filter installed , easy cleaning.




JYAL-800G

Features:
 ** Fully automatic programmed operation
 ** Automatic alarm for overload or shortage of material.
 ** Stainless steel hopper construction.
 ** Main controller and hopper designed, ro ensures safety and convenient.
 ** Separated filter installed , easy to remove pooling of powder.
 ** Automatic Pump reverse system.

Installation Diagram

JYAL-700G、800G

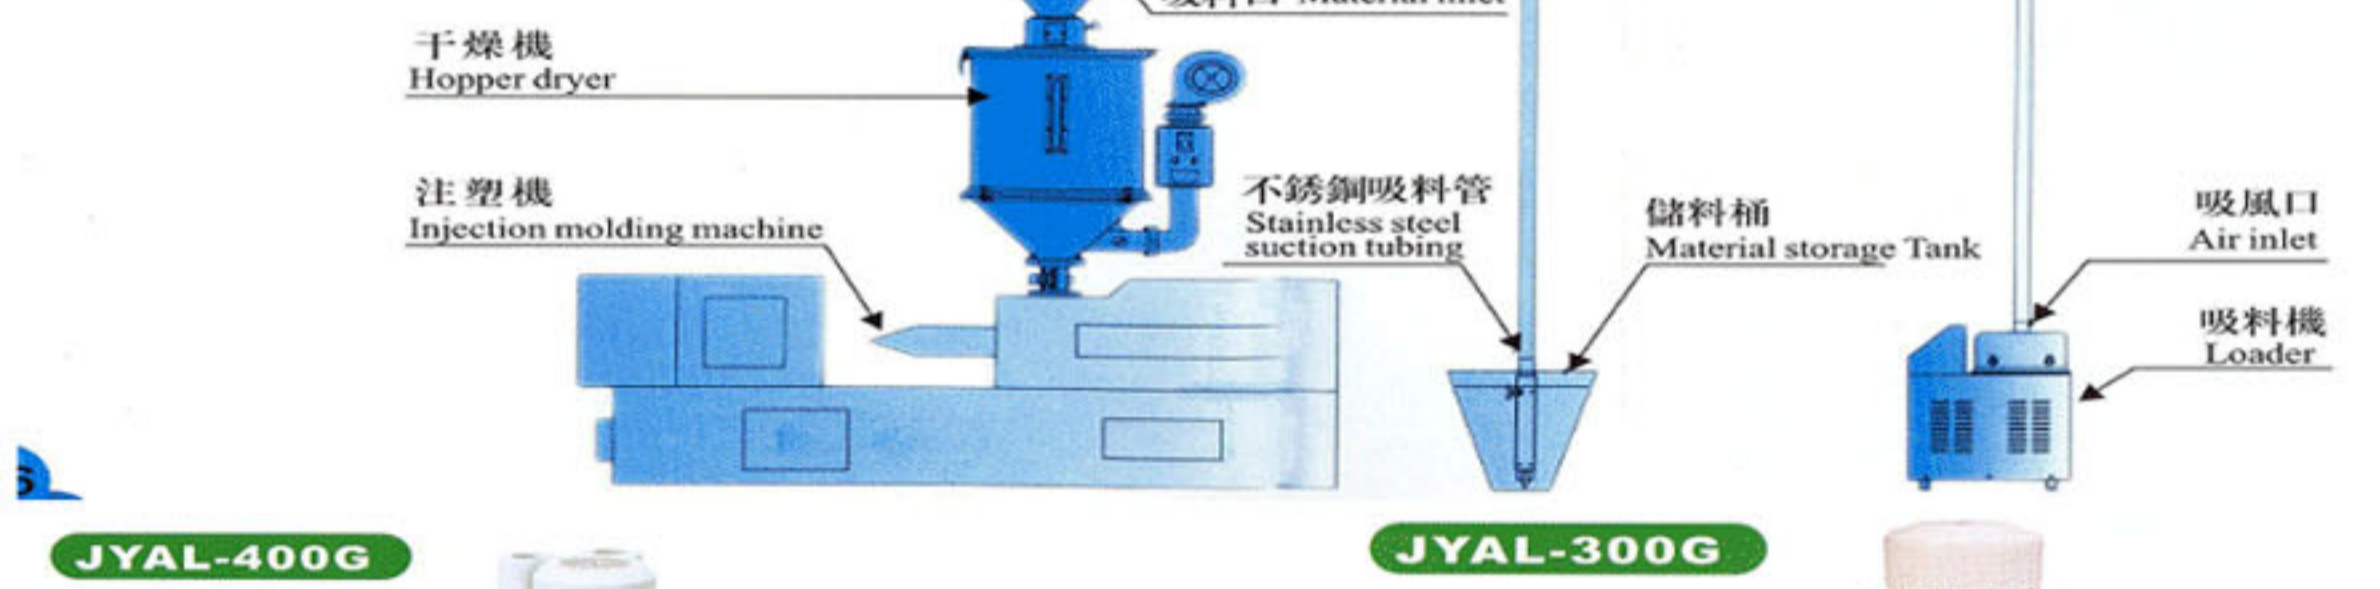


Features:
 ** Microprocessor programmed operation
 ** Alarm for shortage of material
 ** Adopted high-speed motor, small volume with strong suction power, suitable for deferent type of new material.
 ** Installed with dust collector to save dismantling mainframe for cleaning.
 ** Remote controller, easy to set and control convenient and fast.
 ** Install with air filter (Option available)

Features:
 ** Microprocessor programmed operation
 ** Automatic alarm for overload or shortage of material
 ** Adopted with induction high-pressure blower, small volume , quiet, durable.
 ** Equipped with reverse cleaning filter.

Porperntial Valve For Vergin & Regind Material Online.



The VP Porportional Valve finds application when virgin & regind material are to be fed to the vulcoloder on the machine. The small controller will allow to set-up the operation parameter For the VP Valve.

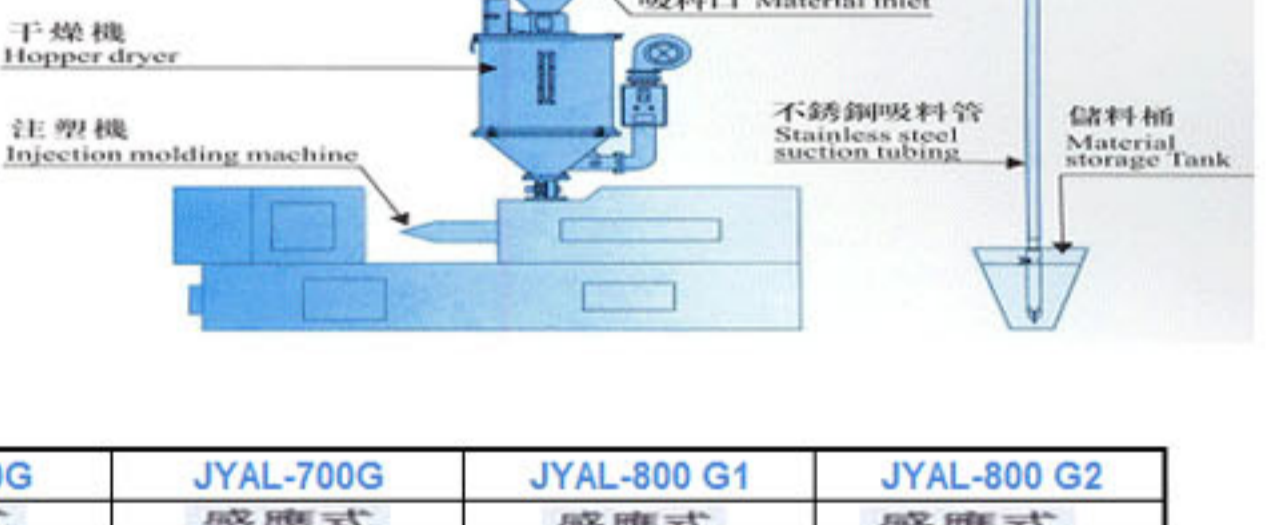

Model	JYAL-300G	JYAL-400G	JYAL-700G	JYAL-800 G1	JYAL-800 G2
Type	碳刷式	感應式	感應式	感應式	感應式
Motor Specification	1 HP	1.5 HP	1.5 HP	1.5 HP	2 HP
Conveying Capacity(kg/h)	250	300	300	400	480
Loading distance (m)	3.5	3.5	3.5	4	5
Static wind pressure (mmH ² O)	1300	1400	1550	1800	2100
Reservoir Volume (L)	7	7	7	9	9
Conveying tube inner dim(mm)	Dia 38 mm	Dia 38 mm	Dia 38 mm	Dia 38 mm	Dia 38 mm
Dimensions (mm)	370x550x270	370x550x270	370x300x560	770x550x420	770x500x420
Net Weight (kg)	12	15	20	50	60

Model	JYAL-800 G3	JYAL-800 G4	JYAL-800 G5	JYAL-900 E
Type	感應式	感應式	感應式	感應式
Motor Specification	3 HP	5 HP	7.5 Hp	3 HP
Conveying Capacity(kg/h)	550	800	1000	300+300
Loading distance (L)	5	6	8	5
Static wind pressure (mmH ² O)	2400	3000	4000	2400
Reservoir Volume (L)	9	20	30	7-7
Conveying tube inner dim(mm)	Dia 38 mm	Dia 51 mm	Dia 63 mm	Dia 38 mm
Dimensions (mm)	770x500x420	790x450x420	790x520x450	770x500x420
Net Weight (kg)	65	100	100	70

SPIRAL MATERIAL MIXER

The spiral type material mixer is suitable for mixing and colour mixture of various kinds of plastic raw material with granular solid state and the colour master batch, and this machine is large-scale equipment for mixing 5 plastic . It has overcome various kinds of mixing defects and drawbacks of traditional material mixers, so it is the idea auxiliary equipment in the process and production of extrusion and injection of plastic.




FEATURES :-
 * Both the charging basket and spiral blade adopt stainless steel to prevent corrosion and ease cleaning.
 * The nounting rack is solid and durable for designed and fabricated in frame.
 * The screw propeller is processed wholly after beging welded, with high concentricity and steady operation.
 * The standing operation results in little land occupation.
 * Mixing with a sealed type, with even material mixing and no leak age of material definitely,
 * Small horsepower, great mixing amount, so fast that can get event mixing in 3-5 minutes.
 * Oil pouring device and material discharging device are designed on the base of framework, with durable bearing.

- * Addition Option**
 1. Electric heating devices
 2. Turing Protection for screw propeller

Model	Capacity (KG)	Power (KW)	Voltage (V)	Demension (cm)	Net weight (Kg)	Heating Power (KW)
JYHS-500	500	3	380 Vac	145x110x220	450	50
JYHS-1000	1000	4	380 Vac	158x138x310	630	50
JYHS-2000	2000	5.5	380 Vac	189x168x347	1050	50
JYHS-3000	3000	7.5	380 Vac	235x213x356	1250	50

HEAVY DUTY DRAWER TYPE MOULD RACK

* Easy to draw in or out with ran dom adjustment for the upper and lower spaces.
 * Equipment with pulleys and manual lifter for easy lifts of moulds.
 * Uniformed sizes and varied matches for ran dom connections any location
 * Assembly-type components for easy installation and dismantle
 * Each rack can hold several moulds for easy maintenance management and access of the moulds within minimum spaces.

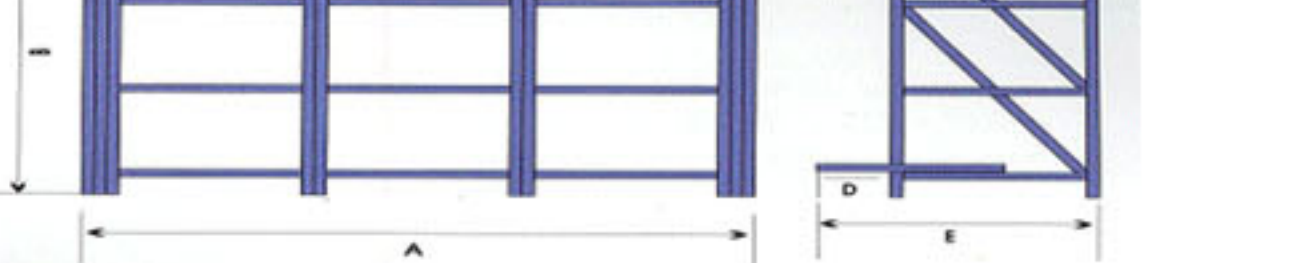

Model	Specification	Max load	A (mm)	B (mm)	C (mm)	D(mm)	E (mm)	Cainblock
JYJM-1000	3 x 4	1000 kg	3100	2000	600	350	950	1 Ton